


LL STAGE CYC

PRODUCT SHEET



Color mixing

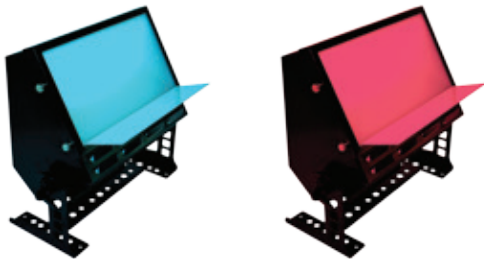

Back stage and soft front lighting

LL STAGE CYC is a compact LED cyclorama / wall wash luminaire with uniform light distribution and dynamic color changing LED technology.

It is available in five basic light color variations.

It is specially designed for theater, television, studios back stage lighting or soft front lighting with high CRI (>95).

LL STAGE CYC is compatible with DMX 512.

Features

- Progressive LED technology
- High CRI > 95
- Continuously variable intensity 0 – 100 %
- Extremely uniform light distribution
- Low power consumption, high total efficacy, long lifespan
- Wide range of light color variations

Application

- Back stage lighting
- Soft front lighting
- Studios, theatres, TV, stages



TECHNICAL SPECIFICATION

Electrical data

Input voltage	AC 90 – 264 V, 47 – 63 Hz, In/Out PowerCon
Power	200 W

Light source

Lamp	72 x LED
------	----------

Photometrical data

Reflector	Special reflective material
Light Colour	RGBAWN, AWN, WN, W – 5 600 K, N – 3 200 K
Lifespan	75.000 hours


Operation conditions

Control data input	DMX 512, In/Out with XLR 5 pin
IP rating	IP20
Operation temperature	-30 ° C to +40 ° C
Cooling	Active 5 dB @ 1 m


Product data

Color	RAL 9005
Material	Aluminium
Weight	5,0 kg

TECHNICAL DRAWING

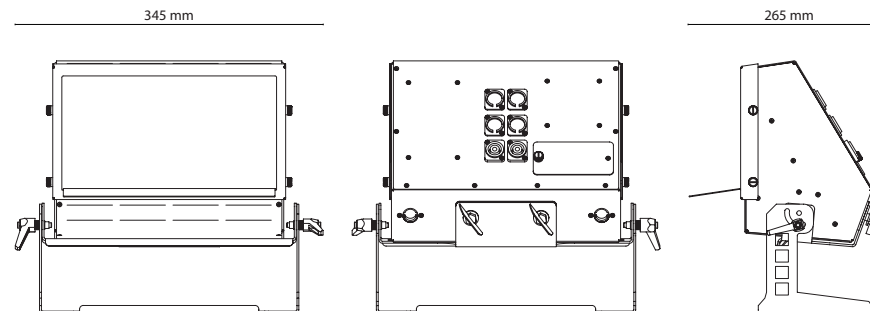

PHOTOMETRY

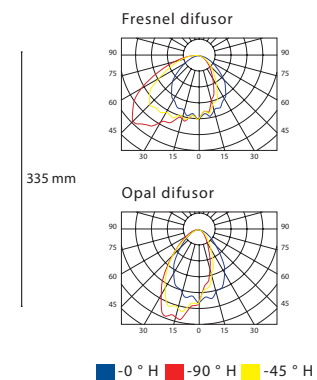


ORDER CODES

LL STAGE CYC 6C RGBAWN MO
 LL STAGE CYC 3C AWN MO
 LL STAGE CYC 2C WN MO
 LL STAGE CYC 1C W 5600K MO
 LL STAGE CYC 1C N 3200K MO

ACCESSORIES

LL STAGE CYC TUBUS
 LL STAGE CYC POLE OPERATION BRACKET PO



LL STAGE CYC TUBUS



LL STAGE CYC POLE OPERATION BRACKET PO