

# LL MP1 O1200-35W

PRODUCT SHEET



## Product variants



LL MP1 O600-15W  
LL MP1 O600-30W

LL MP1 O1200-35W  
LL MP2 O1200-50W

LL MP1 O2400-50W  
LL MP2 O2400-100W

## Public spaces

LL MP is subtle LED luminaire for general lighting with broad applicability, with wide flexibility in light distribution.


The characteristic features are high energy savings and extreme long lifespan.

## Features

- LED technology
- Alluminium body with optimal temperature parameters
- Wide choice of special optic covers
- Surface and pendant mounting with adjustable wire accessory
- High energy savings and fast return of investment

## Application

- Office
- School
- Retail
- Supermarkets and shopping centers
- Commercial and public halls



## TECHNICAL SPECIFICATION

### Electrical data

Input voltage	220–240 V AC, 50–60 Hz
Power	35 W
Max. inrush current	53 A, 200 $\mu$ s, 230 V AC
Driver	Included

### Light source

Light source	LED
Exchangeable	no

### Photometrical data

Optic	Standard: SO – diffusion cover, FR – fresnel CL – plexiglass Optional: O1 – 90° x 45°, O2 – 115° x 58°, O3 – 108° x 89° ASY – asymmetrical, ASYD – double asymmetrical
CCT	Standard: 4.000 K Optional: 3.000 K
CRI	80

### Light technical data

Lifespan L70 B20	50.000 hours, Ta 25 ° C
Efficiency	Min. 100 lm / W

### Operation conditions

Control	Standard: On / Off Optional: DALI, PWL
IP rating	IP20
Operation temperature	-30 ° C to +40 ° C
Cooling	Conventional


### Product data

Color	Standard: Natural Optional: Black or RAL
Material	Anodized aluminium

### Packing information (preliminary information)

Dimension (box)	1220 mm x 45 mm x 60 mm
Weight	3,20 kg

## TECHNICAL DRAWING



## OPTIONAL ELECTRONIC MODULE

**LL MP DALI DRIVER:** additional electronic module for DALI control of the luminaire

## ORDER CODES


LL MP1 O1200-35W-SO-40K-C80-I20-NA  
LL MP1 O1200-35W-FR-40K-C80-I20-NA

## ACCESSORIES






LL MP ADJ SUSPENSION – 2 m adjustable wire suspension (1 pair)

## MOUNTING

Direct on ceiling or suspended with wire

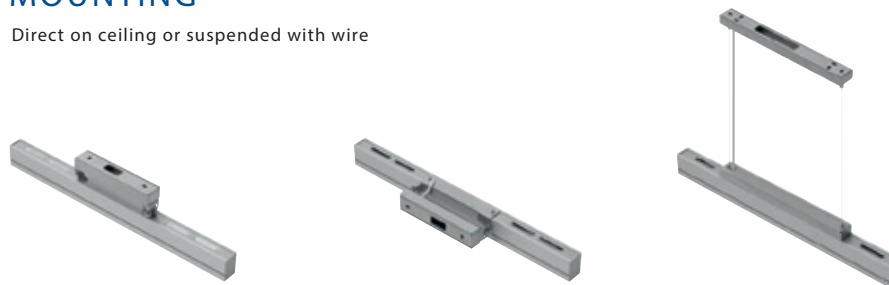

## PHOTOMETRY



■ -0° H ■ -90° H

