

LL SPOT DC 24V Monochrome

PRODUCT SHEET



Decorative lighting

LL SPOT Monochrome offers all benefits of modern LED technology and is ideal for architectural and commercial applications. It's available in several light variants.


For intensity and color control is necessary connection with LL DRIVER.

Features

- Monochrome LED technology
- High optical performance
- Uniform light distribution
- Low power consumption, high total efficacy, long lifespan

Application

- Color accent lighting
- Museums, art galleries
- Modern and historical buildings, public areas
- Sculptures and plastic arts



TECHNICAL SPECIFICATION

Electrical data

Input voltage	PWM 24 V or DC 24 V
Power	25 W

Light source

Light source	18 x LED
Exchangeable	no

Photometrical data

Optic	Standard: 15 ° Optional: 30 °, 40 °, 60 °, EL 20 ° x 40 °
Light Colour - Monochrome	R – Red, G – Green, B – Blue, A – Amber White: 3.000 K, 4.000 K, 5.000 K (CRI80)
Lifespan	50.000 hours


Operation conditions

Operation	LL DRIVER 24 V DC
Control data input	1 channel 24V dimming
IP rating	Standard: IP43 Optional: IP65
Operation temperature	-30 ° C to +40 ° C
Cooling	Conventional

Product data

Color	Standard: SI - RAL9006
Material	Aluminium
Weight	3,00 kg

TECHNICAL DRAWING

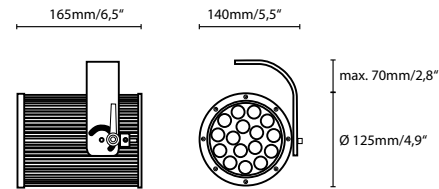

ORDER CODES

LL SPOT L125-18-25W-015-R-SC-I20-SI
 LL SPOT L125-18-25W-015-G-SC-I20-SI
 LL SPOT L125-18-25W-015-B-SC-I20-SI
 LL SPOT L125-18-25W-015-A-SC-I20-SI


LL SPOT L125-18-25W-015-30K-C80-I20-SI
 LL SPOT L125-18-25W-015-40K-C80-I20-SI
 LL SPOT L125-18-25W-015-50K-C80-I20-SI

ACCESSORIES


LL SPOT D125-FLOOR-STAND

PHOTOMETRY


015 Optic




030 Optic



040 Optic



060 Optic



■ -0 ° H ■ -90 ° H