

LL WASH DMX

PRODUCT SHEET



Product variants



LL WASH D23



LL WASH D63

Decorative lighting

LL WASH DMX is an extra powerful LED luminaire ideal for color changing washing large areas. It is characterized by accurate and uniform light distribution. The rare optic generates perfect shaped light ideal for obscure area floodlighting and wall washing.


This range is compatible with DMX512. It simplifies installations by discovering and addressing lights in a network.

Features

- Color RGBAW LED technology
- Smooth dimming 0 % – 100 %
- Perfect shaped light
- Low power consumption, high total efficacy, long lifespan
- Variable light color in the whole spectral range

Application

- Commercial and public halls
- Color floodlighting and wall washing
- Shopping centers
- Museums, art galleries
- Modern and historical buildings



TECHNICAL SPECIFICATION

Electrical data

Input voltage	90 – 264 V AC, 47 – 63 Hz, 127 – 370 V DC
Power	22 x LED / 34 W
	66 x LED / 102 W

Light source

Light source	22 / 66 x LED
Exchangeable	no

Photometrical data

Optic	Standard: 15 ° Optional: 30 °, 40 °, 60 °, EL 20 ° x 40 °, ASY
Light Colour	Single Chip RGBAW (R – Red, G – Green, B – Blue, A – Amber W – White)

Light technical data

Lifespan	50.000 hours
----------	--------------


Operation conditions

Control	DMX 512
IP rating	Standard: IP65
Operation temperature	-30 ° C to +40 ° C
Cooling	Conventional

Product data

Color	Standard: SI - RAL9006
Material	Aluminium
Weight	LL WASH D23: 3,00 kg
	LL WASH D63: 5,50 kg

TECHNICAL DRAWING

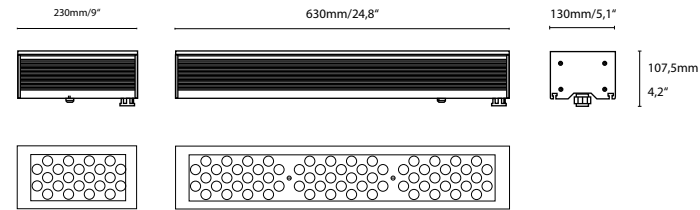





ORDER CODES

LL WASH D23-22-34W-015-RGBAW-SC-O65-SI
LL WASH D63-66-102W-015-RGBAW-SC-O65-SI

ACCESSORIES

LL WASH D23-BRACKET-ADJ
LL WASH D23-BRACKET-FIX
LL WASH D63-BRACKET-ADJ
LL WASH D63-BRACKET-FIX

PHOTOMETRY



■ -0 ° H ■ -90 ° H